




- 16 channel DVR
- **HYBRID**: Analog & IP
- Up to **4K Resolution Output**
- Control over Coax

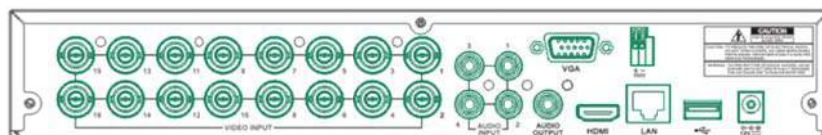

DISPLAY

Resolution Up to **4K** output

Feature 1/4/6/8/9/10/13/14/16/17/
19/22/25/S.E.Q.

RECORD

Resolution **Analog:** 3MP/1080P/720P/960H
IP: 3MP/1080P/720P/960H

Speed **High Definition:**
3MP: 12fps (each ch)
1080P: 15fps (each ch)

720P:
PAL: 25fps (each ch)
NTSC: 30fps (each ch)

960H:
PAL: 25fps (each ch)
NTSC: 30fps (each ch)

IP:
2MP: 30 fps (each ch)
3MP: 20 fps (each ch)

SPECIFICATIONS

Video Compression	Recording @ H.264 Accepts H.265 Cameras
Video System	NTSC/PAL
Operating System	Linux (embedded)
Analog video input/output	16CH input /VGA & HDMI output
IP Video Input	Up to 24 CH
Composite Video Input	Up to 40 CH
Audio Input / Output	4CH inputs / 1 CH output (RCA)
IP-Recording Bandwidth	32Mbps~ 96Mbps(default is 32Mbps, decrease one Analog channel can increase 4Mbps)
Max. Output Bandwidth	96Mbps
Max. Decode Performance	3MP
Recording Mode	Continuous/Manual/Motion detect
Synchronous Playback	16 CH
Network Type	TCP/IP, P2P, 1 SATA HDD, up to 8TB
HDD Interface	2 x SATA
USB	2 x USB (for mouse and backup)
Sensor & Alarm I/O	No
PTZ Control	Yes (RS485) Control over Coax
Mobile Surveillance	Supports mobile phones: iPhone/Android
VGA/HDMI Output	1024*768, 1280*1024, 1440*900, 1280*720, 1920*1080, 1680*1050, 1600*1200, 1920*1200, 2560*1440, 3840*2160
Power Supply	DC12V/2A
Dimensional	300 x 227 x 53mm
Working Temperature	-10°C~+55°C
Working Humidity	10%~90%